



ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

Concrete Block Paving - Facemix Semi Dry Mix
Marshalls Plc



EPD HUB, HUB-0498

Publishing date 30 June 2023, last updated on 30 June 2023, valid until 30 June 2028.

GENERAL INFORMATION

MANUFACTURER

Manufacturer	Marshalls Plc
Address	Landscape House, Premier Way, Elland HX5 9HT, England, UK
Contact details	epd@marshalls.co.uk
Website	www.marshalls.co.uk

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022 EN 16757 Product Category Rules for concrete and concrete elements
Sector	Construction product
Category of EPD	Third party verified EPD
Scope of the EPD	Cradle to gate with options, A4-B1, and modules C1-C4, D
EPD author	C Griffiths, R Dorrington, S Lang - Marshalls PLC
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal certification <input checked="" type="checkbox"/> External verification
EPD verifier	Elma Avdyli, as an authorized verifier acting for EPD Hub Limited

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

PRODUCT

Product name	Concrete Block Paving - Facemix Semi Dry Mix
Additional labels	Lunar, Conservation X Block (varieties), Myriad, Modal (varieties), Conservation X Priora, Myriad Priora, Modal Priora, Drivesett Lunar, Driveline 50, Drivesett Argent Priora, Driveline Metro, Driveline Nova, Medley Driveway, Rio Driveways, Rio Permeapave, Vecta
Product reference	N/A
Place of production	Ramsbottom & Eaglescliffe (UK)
Period for data	2022
Averaging in EPD	Multiple factories
Variation in GWP-fossil for A1-A3	-

ENVIRONMENTAL DATA SUMMARY

Declared unit	1m ²
Declared unit mass	138 kg
GWP-fossil, A1-A3 (kgCO ₂ e)	1,55E1
GWP-total, A1-A3 (kgCO ₂ e)	1,34E1
Secondary material, inputs (%)	0.0239
Secondary material, outputs (%)	94.9
Total energy use, A1-A3 (kWh)	34.3
Total water use, A1-A3 (m ³ e)	5,9E-1

PRODUCT AND MANUFACTURER

ABOUT THE MANUFACTURER

Marshalls is the UK's largest manufacturer and supplier of building and hard landscaping products, including paving blocks and flags, kerbs, drainage channels, bricks, roof tiles, street furniture and natural stone paving. It provides products for both commercial and domestic markets.

PRODUCT DESCRIPTION

The product is a concrete block paving unit. Blocks are laid in an interlocking pattern on a sand and aggregate sub-base to create an attractive trafficable surface.

This document is for a dual-layer block manufactured using a semi-dry mix, comprising of a standard backing mix complemented with a 6-10mm facemix layer comprising of premium materials to create a variety of different aesthetics. The two layers are cast together in the mould, creating one homogenous unit. These blocks frequently receive a secondary process to create different textures on the surface and expose the premium aggregates in the face.

Concrete blocks are manufactured according to BS EN 1338:2003, which requires the strength of the blocks to be no lower than 3.6MPa and the failing load not lower than 250N/mm. Other factors which must be satisfied to achieve the standard include slip / skid resistance, freeze / thaw performance and water absorption. Test methods and minimum criteria are detailed in the standard.

The nominated depth for the product specified in this document is 60mm. Conversion factors for different depths are listed in the document.

Further information can be found at www.marshalls.co.uk.

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	N/A	N/A
Minerals	100	EU
Fossil materials	N/A	N/A
Bio-based materials	N/A	N/A

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C -

Biogenic carbon content in packaging, kg C 0.624652054

FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit VP-011	1m ²
Mass per declared unit VP-012	138 kg
Functional unit	1m ² of 60mm concrete block paving with useful service life of 50 years
Reference service life	50 years

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	x	MND	MND	MND	MND	MND	MND	x	x	x	x	x		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not declared = MND. Modules not relevant = MNR.

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, fuels used by machines, and handling of waste formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

Facemix concrete blocks are manufactured using a semi-dry concrete mix. Two different specified blends of aggregates, binder material, water and admixtures are dispensed from hoppers into two mixers. The premium facemix mixture is then emptied into a mould to a depth of 5-10mm. The secondary backing mix is then added to top the moulds up. A precision-cut tamper plate applies pressure to the top of each cell in the mould. The tamper plate lifts and the mould

is removed, leaving a number of cast concrete block units on a board. In some instance, a secondary process is applied to the surface of the blocks to create a different surface texture or aesthetic. The board is moved to a chamber where the blocks remain in place while they cure and achieve strength. The length of time in the curing chamber is dependent on atmospheric conditions; on very rare occasions some heat is required to accelerate this process but usually the concrete cures naturally via an exothermic process. Once sufficiently cured, in some instances a secondary process is applied to blast or otherwise texture the surface. The blocks are collected by robot (cubed) and stacked on a banding machine.

Any water lost during manufacture is recycled - collected and reintroduced to the mix. Material waste during manufacture is negligible.

Straps are secured around the blocks. In some cases, the blocks are stacked in such a way as to leave voids near the base which allow FLT forks to penetrate the stack and transport it without the need for a pallet.

Some facemix products require an additional protective plastic film hood (to protect the top layer and / or to keep the pack secure). In these cases, the hood is placed over the pack by robot, and then the whole pack is passed through an oven to shrink the film securely round the blocks.

TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts occurred from final products delivery to construction site (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions.

A4: During the time period measured, manufacture of through mix concrete blocks took place at two different sites within the UK: Ramsbottom & Eaglescliffe. Transport to site or yard is undertaken by articulated lorries with Euro 6 engines. We have calculated that the average journey undertaken by these products from manufacturing site to installation site during the time period allocated was 232km. This is over 2 legs: 78km to an internal service centre (distribution hub) and 154km to the customer site or yard.

A5: In the UK, installation of concrete block paving is a manual process. Blocks are laid by hand.

PRODUCT USE AND MAINTENANCE (B1-B7)

B1: The carbonation (sequestration) value has been calculated as per methodology outlined in EN 16757:2022.

Air, soil, and water impacts during the use phase have not been studied.

PRODUCT END OF LIFE (C1-C4, D)

C1: In the UK, removal of concrete flag paving is a manual process.

C2: It is assumed that 7% of product is transported 50km to a waste processing site to be landfilled, and 93% of product is reused. This is evidenced on UK Governments Statistics on Construction Waste website: 7. Recovery rate from non-hazardous construction and demolition (C&D) waste - Table 8: England, 2010–2020: <https://www.gov.uk/government/statistics/uk-waste-data/uk-statistics-on-waste#recovery-rate-from-non-hazardous-construction-and-demolition-cd-waste>


C3: All material (whether used on site or treated at a waste processing facility) will be crushed. 93% will be reused on site as infill; 7% will be transported to landfill.

C4: It is assumed that 7% of material will go to landfill.

D: Due to the recycling potential of concrete, it can be used as secondary raw material, which avoids the use of virgin raw materials. The 93% of concrete going to waste processing is converted into secondary raw materials after recycling. The benefit of recycled concrete claimed in module D have excluded the amount of secondary material input. In addition incineration of the strapping and packaging generates energy.

D: Incineration of the strapping and packaging generates energy. Concrete reused at end-of-life prevents virgin aggregate being used.

MANUFACTURING PROCESS VP

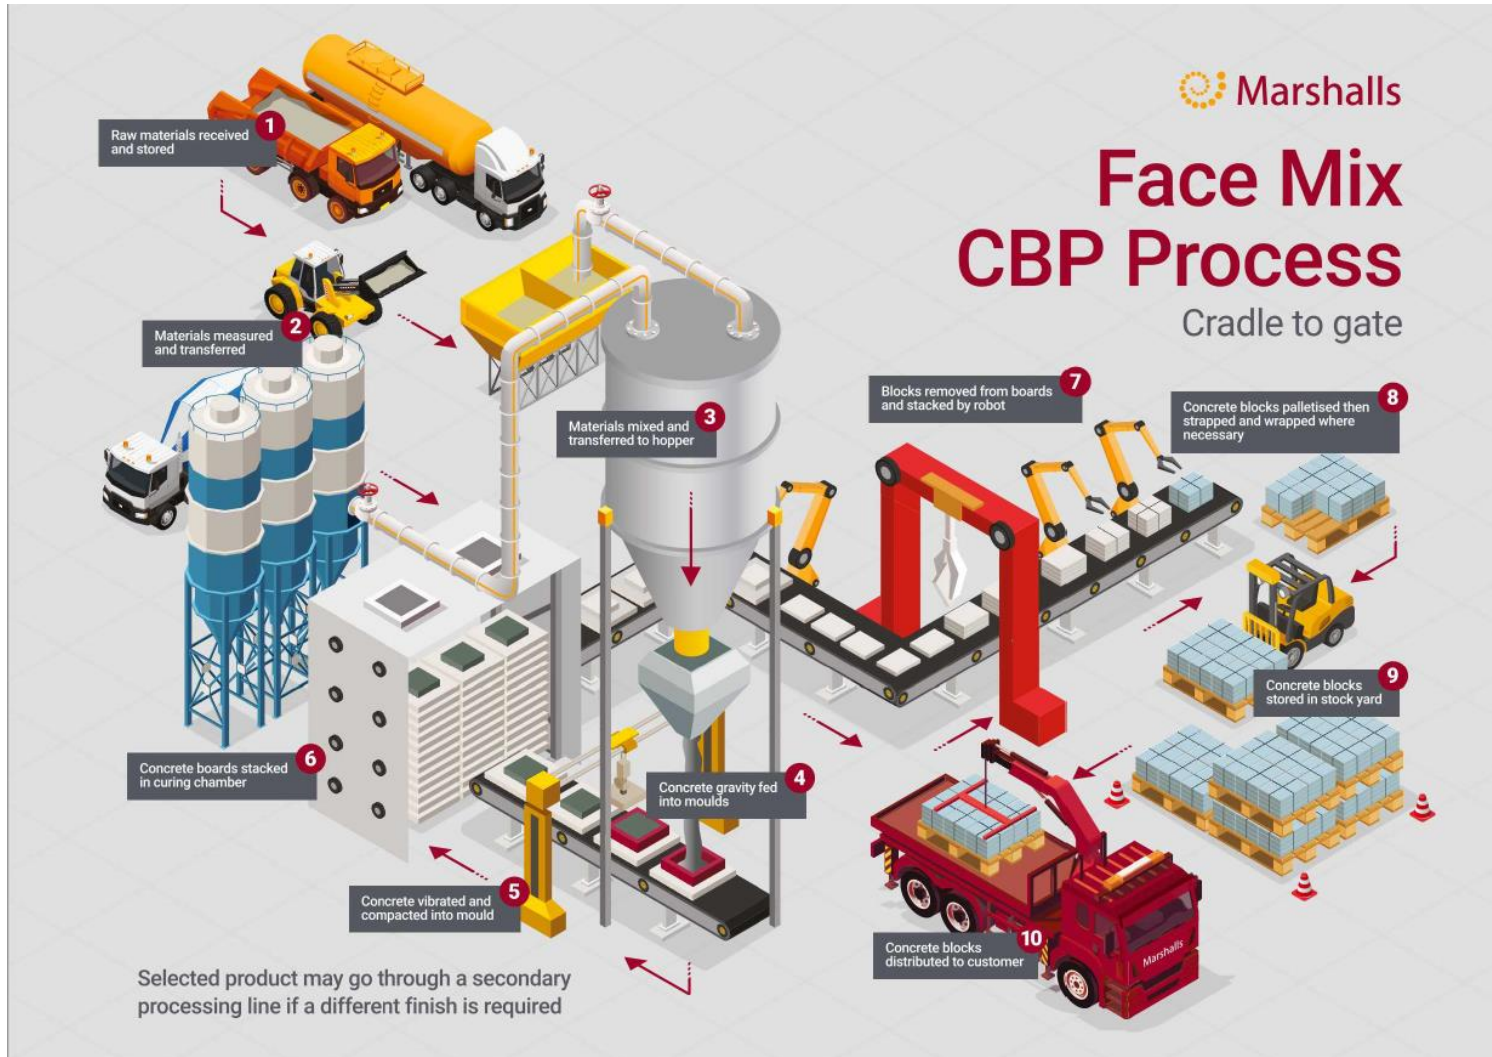

LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	Not applicable
Ancillary materials	Not applicable
Manufacturing energy and waste	Allocated by mass or volume

AVERAGES AND VARIABILITY

Type of average	Multiple factories
Averaging method	Averaged by shares of total mass
Variation in GWP-fossil for A1-A3	-

Primary data represents the 2 Marshalls sites at which premium block paving is manufactured. All products covered by this EPD use the same mix design with minor differences in pigmentation. The only material difference is that some of these products are sold in different depths (50mm, 60mm or 80mm).

The data was used to calculate average impacts for the product. The variability of the primary data or the emissions between the manufacturing sites did not amount to more than 10 % for the relevant data. The primary data was averaged by calculating a weighed average of the sites consumption of raw materials and energy, and production of wastes. The share of production volume per each site was used in the weighting.

Primary data represents the manufacturing of all through mix concrete block paving products (listed at the start of this document). The data was used to calculate average impacts for the products. The variability of the primary data or the emissions between the products did not amount to more than 10% of the relevant data (the highest compared to the lowest). The primary data was averaged by calculating a weighed average of the

products consumption of raw materials, energy and production of wastes. The production amount mass shares per each product was used in the weighting.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. Ecoinvent and One Click LCA databases were used as sources of environmental data.

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	1,38E1	5,52E-1	-1,01E0	1,34E1	3,28E0	2,52E0	-3,77E0	MND	MND	MND	MND	MND	MND	0E0	6,18E-1	5,24E-1	5,24E-2	-2,46E-1
GWP – fossil	kg CO ₂ e	1,36E1	5,51E-1	1,28E0	1,55E1	3,3E0	2,51E-1	-3,77E0	MND	MND	MND	MND	MND	MND	0E0	6,17E-1	5,24E-1	5,23E-2	-1,87E0
GWP – biogenic	kg CO ₂ e	2,11E-1	3,98E-4	-2,29E0	-2,08E0	1,88E-4	2,27E0	0E0	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	1,63E0
GWP – LULUC	kg CO ₂ e	4,62E-3	1,67E-4	3,36E-3	8,15E-3	1,75E-3	5,22E-6	0E0	MND	MND	MND	MND	MND	MND	0E0	1,94E-4	4,43E-5	1,55E-5	-3,35E-3
Ozone depletion pot.	kg CFC ₁₁ e	6,09E-7	1,3E-7	3,22E-7	1,06E-6	7,07E-7	2,79E-9	0E0	MND	MND	MND	MND	MND	MND	0E0	1,52E-7	1,13E-7	2,15E-8	-1,66E-7
Acidification potential	mol H ⁺ e	4,21E-2	2,31E-3	7,22E-3	5,17E-2	8,03E-2	2,34E-4	0E0	MND	MND	MND	MND	MND	MND	0E0	1,99E-3	5,48E-3	4,96E-4	-1,5E-2
EP-freshwater ²⁾	kg Pe	1,94E-4	4,49E-6	3,31E-5	2,31E-4	1,79E-5	2,82E-7	0E0	MND	MND	MND	MND	MND	MND	0E0	5,24E-6	2,12E-6	6,31E-7	-1,15E-4
EP-marine	kg Ne	1,04E-2	6,97E-4	1,9E-3	1,3E-2	1,99E-2	1,08E-4	0E0	MND	MND	MND	MND	MND	MND	0E0	4,36E-4	2,42E-3	1,71E-4	-2,31E-3
EP-terrestrial	mol Ne	1,24E-1	7,7E-3	2,11E-2	1,53E-1	2,21E-1	1,14E-3	0E0	MND	MND	MND	MND	MND	MND	0E0	4,86E-3	2,66E-2	1,88E-3	-2,94E-2
POCP (“smog”) ³⁾	kg NMVOCe	3,18E-2	2,47E-3	7,18E-3	4,14E-2	5,81E-2	2,86E-4	0E0	MND	MND	MND	MND	MND	MND	0E0	1,91E-3	7,3E-3	5,46E-4	-7,69E-3
ADP-minerals & metals ⁴⁾	kg Sbe	1,03E-4	9,54E-6	1,25E-5	1,25E-4	3,26E-5	3,38E-7	0E0	MND	MND	MND	MND	MND	MND	0E0	1,1E-5	8,01E-7	4,78E-7	-1,14E-4
ADP-fossil resources	MJ	7,19E1	8,57E0	3,45E1	1,15E2	4,55E1	2,47E-1	0E0	MND	MND	MND	MND	MND	MND	0E0	1E1	7,21E0	1,46E0	-2,84E1
Water use ⁵⁾	m ³ e depr.	2,11E0	3,18E-2	3,18E-1	2,46E0	1,15E-1	-1,16E-2	0E0	MND	MND	MND	MND	MND	MND	0E0	3,73E-2	1,35E-2	6,76E-2	-1,95E0

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO₄e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁶⁾	MJ	4,62E0	1,08E-1	9,4E0	1,41E1	3,83E-1	4,73E-3	0E0	MND	MND	MND	MND	MND	MND	0E0	1,26E-1	3,9E-2	1,18E-2	-5,56E0
Renew. PER as material	MJ	0E0	0E0	2,2E1	2,2E1	0E0	-2,2E1	0E0	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Total use of renew. PER	MJ	4,62E0	1,08E-1	3,14E1	3,61E1	3,83E-1	-2,2E1	0E0	MND	MND	MND	MND	MND	MND	0E0	1,26E-1	3,9E-2	1,18E-2	-5,56E0
Non-re. PER as energy	MJ	6,83E1	8,57E0	3,1E1	1,08E2	4,55E1	2,47E-1	0E0	MND	MND	MND	MND	MND	MND	0E0	1E1	7,21E0	1,46E0	-2,84E1
Non-re. PER as material	MJ	3,66E0	0E0	3,51E0	7,17E0	0E0	-3,49E0	0E0	MND	MND	MND	MND	MND	MND	0E0	0E0	-3,26E0	-2,46E-1	0E0
Total use of non-re. PER	MJ	7,19E1	8,57E0	3,45E1	1,15E2	4,55E1	-3,24E0	0E0	MND	MND	MND	MND	MND	MND	0E0	1E1	3,95E0	1,22E0	-2,84E1
Secondary materials	kg	1,88E-2	0E0	1,42E-2	3,3E-2	0E0	0E0	0E0	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0

Renew. secondary fuels	MJ	0E0	0E0	1,34E0	1,34E0	0E0	0E0	0E0	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Non-ren. secondary fuels	MJ	0E0	0E0	0E0	0E0	0E0	0E0	0E0	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Use of net fresh water	m ³	5,83E-1	1,78E-3	5,53E-3	5,9E-1	5,93E-3	3,55E-4	0E0	MND	MND	MND	MND	MND	MND	0E0	2,09E-3	6,37E-4	1,6E-3	-1,49E-1

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	2,5E-1	8,34E-3	4,64E-2	3,05E-1	4,76E-2	7,59E-3	0E0	MND	MND	MND	MND	MND	MND	0E0	9,74E-3	0E0	1,36E-3	-1,54E-1
Non-hazardous waste	kg	8,5E0	9,14E-1	1,19E0	1,06E1	2,06E0	1,19E0	0E0	MND	MND	MND	MND	MND	MND	0E0	1,08E0	0E0	9,92E0	-3,69E0
Radioactive waste	kg	3,24E-4	5,88E-5	1,56E-4	5,39E-4	3,17E-4	9,39E-7	0E0	MND	MND	MND	MND	MND	MND	0E0	6,88E-5	0E0	9,67E-6	-1,44E-4

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0E0	0E0	0E0	0E0	0E0	0E0	0E0	MND	MND	MND	MND	MND	MND	0E0	0E0	1,31E2	0E0	0E0
Materials for recycling	kg	0E0	0E0	0E0	0E0	0E0	0E0	0E0	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Materials for energy rec	kg	0E0	0E0	0E0	0E0	0E0	1,18E0	0E0	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Exported energy	MJ	0E0	0E0	0E0	0E0	0E0	1,55E1	0E0	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	1,35E1	5,47E-1	1,25E0	1,53E1	3,28E0	2,5E-1	-3,77E0	MND	MND	MND	MND	MND	MND	0E0	6,12E-1	5,2E-1	5,13E-2	-1,82E0
Ozone depletion Pot.	kg CFC ₁₁ e	5,46E-7	1,03E-7	2,58E-7	9,08E-7	5,6E-7	2,3E-9	0E0	MND	MND	MND	MND	MND	MND	0E0	1,2E-7	8,96E-8	1,71E-8	-1,56E-7
Acidification	kg SO ₂ e	3,36E-2	1,12E-3	5,6E-3	4,04E-2	6,37E-2	1,58E-4	0E0	MND	MND	MND	MND	MND	MND	0E0	1,31E-3	7,74E-4	2,07E-4	-1,15E-2
Eutrophication	kg PO ₄ ³ e	8,52E-3	2,27E-4	1,5E-3	1,02E-2	7,34E-3	2E-4	0E0	MND	MND	MND	MND	MND	MND	0E0	2,65E-4	1,36E-4	4E-5	-3,58E-3
POCP ("smog")	kg C ₂ H ₄ e	1,21E-3	7,11E-5	3,99E-4	1,68E-3	1,7E-3	3,77E-6	0E0	MND	MND	MND	MND	MND	MND	0E0	7,55E-5	7,97E-5	1,52E-5	-6,41E-4
ADP-elements	kg Sbe	1,03E-4	9,54E-6	1,25E-5	1,25E-4	3,26E-5	3,38E-7	0E0	MND	MND	MND	MND	MND	MND	0E0	1,1E-5	8,01E-7	4,78E-7	-1,14E-4
ADP-fossil	MJ	7,19E1	8,57E0	3,45E1	1,15E2	4,55E1	2,47E-1	0E0	MND	MND	MND	MND	MND	MND	0E0	1E1	7,21E0	1,46E0	-2,84E1

VERIFICATION STATEMENT

VERIFICATION PROCESS FOR THIS EPD

This EPD has been verified in accordance with ISO 14025 by an independent, third-party verifier by reviewing results, documents and compliance with reference standard, ISO 14025 and ISO 14040/14044, following the process and checklists of the program operator for:

- This Environmental Product Declaration
- The Life-Cycle Assessment used in this EPD
- The digital background data for this EPD

Why does verification transparency matter? Read more online
This EPD has been generated by One Click LCA EPD generator, which has been verified and approved by the EPD Hub.

THIRD-PARTY VERIFICATION STATEMENT

I hereby confirm that, following detailed examination, I have not established any relevant deviations by the studied Environmental Product Declaration (EPD), its LCA and project report, in terms of the data collected and used in the LCA calculations, the way the LCA-based calculations have been carried out, the presentation of environmental data in the EPD, and other additional environmental information, as present with respect to the procedural and methodological requirements in ISO 14025:2010 and reference standard.

I confirm that the company-specific data has been examined as regards plausibility and consistency; the declaration owner is responsible for its factual integrity and legal compliance.

I confirm that I have sufficient knowledge and experience of construction products, this specific product category, the construction industry, relevant standards, and the geographical area of the EPD to carry out this verification.

I confirm my independence in my role as verifier; I have not been involved in the execution of the LCA or in the development of the declaration and have no conflicts of interest regarding this verification.

Elma Avdyli, as an authorized verifier acting for EPD Hub Limited
30.06.2023



CONVERSION TABLE FOR ALTERNATIVE DEPTHS

The correlation between the material and energy inputs to calculate A1-A3 numbers is linear.

Therefore, to calculate A1-A3 (GWP Total & GWP Fossil) values for profiles and / or sizes, apply the following percentages to the A1-A3 number shown within this document:

Unit depth (mm)	A1- A3		
	Conversion factor	kg CO ₂ e - fossil	kg CO ₂ e - total
50	-16.60%	12.93	11.18
60	0	15.50	13.40
80	33.30%	20.66	17.86